


## MOUNTING INSTRUCTIONS

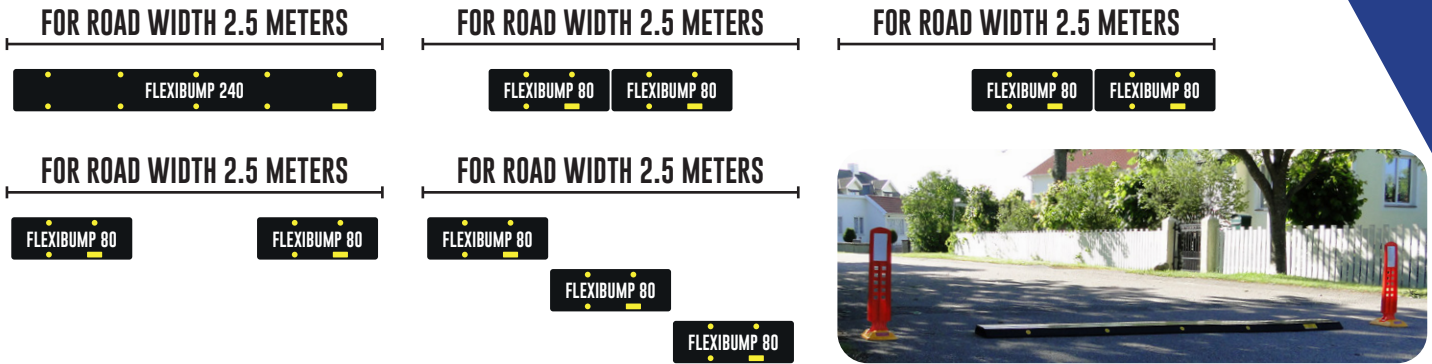


## INSTALLATION

1. CHOOSE A SUITABLE LOCATION
2. LAY OUT THE SECTIONS LOOSELY
3. ANCHOR THE FASTENING BARS

Ensure the location chosen allows clear visibility of the speed bump.

Take a step back to make sure that the placement is correct.

Feel free to use a small sledgehammer. Make sure the fastening bars sink properly into the rubber so they do not protrude during passage.

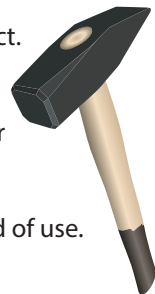

**DONE!**

**NOTE!** Re-hammer the fastening bars after a short period of use.

## DISMANTLING

1. LOOSEN THE FASTENING BARS
2. WILL FLEXIBUMP BE REUSED?
3. STORE FLEXIBUMP
4. PREPARE FOR THE NEXT SEASON

Use a crowbar to lift each fastening bar. If any fastening bar remains in the ground, tap it gently from different angles to make it easier to remove.

For hard surfaces, such as asphalt, use spray paint around the holes to find the exact location.

Flexibump is suitable for outdoor storage and does not have specific temperature requirements, but we recommend storing Flexibump on a flat surface.

Do you need more units?  
Are the reflectors still in good condition or do they need to be replaced for the next season?  
In which shape are the signs and side markings?

